

Sinilink XY-S100L 2.1 channel Bluetooth audio power amplifier board module high and bass adjustment subwoofer 50W*2+100W

Ultimate Edition XY-S100L

**2.1 channel bluetooth digital power amplifier board
50W*2+100W Subwoofer**

- Pure HIFI fever sound quality
- Pure and transparent treble
- The midrange is gentle and delicate
- Bass surging and shocking

*Independent adjustment of left and right channel treble and bass
Independent bass adjustment
360 degree stepless tuning*

**Gift:
mobile APP
sinilink
control supports
Android and IOS**

Bluetooth 5.0 AUX import U disk playback USB sound card HIFI Sound quality

*Sinilink
XINYI SINI AUDIO
XY-S100L
TREBLE AND BASS TUNING
2.1 CHANNEL HIFI POWER AMPLIFIER
50W*2+100W*

Of Contents

Sinilink XY-S100L 2.1 channel Bluetooth audio power amplifier board module high and bass adjustment subwoofer 50W*2+100W	1
Of Contents	1
1.Comparison chart of S100H and S100L.....	3

2. Multi-function main knob	5
3. Function Introduction	6
4. Nude plate construction	7
5. Installation schematic diagram	8
6. Product shipping list	9
7. product size	10
8. Product parameter table	11
9. Notes for product use	11
9.1 Heat sink installation	11
9.2 Audio input mode switch	12
9.3 Power supply selection	12
9.4 Horn selection	12
9.5 Signal problem	12
10. How to connect your mobile phone to Bluetooth	13
11. How to download a mobile APP	14
12. How to connect to your cell phone APP	15



1.Comparison chart of S100H and S100L

S series 50W*2+100W Bluetooth power amplifier board selection table		
Model	XY-S100L Ultimate Edition	XY-S100H Extreme Edition
Picture		
Character	Designed by efficient Class-D stereo amplifier, with excellent audio performance, good distortion and anti-pop function, Sound mellow, voice permeability, superior sound	Designed by efficient Class-D stereo amplifier TPA3116D2, with superhigh fidelity (HIFI) and stronger driving ability
sinilink APP	YES	YES
Power Supply	DC5-26V/5A	DC5-26V/5A
Bluetooth Version	5.0	5.0
Audio Input	Bluetooth + AUX + U disk + USB soundmax	Bluetooth + AUX + U disk + USB soundmax
Volume control	Rotate 360 degrees by encoder	Rotate 360 degrees by encoder
Audio output	R&L Channels +3.5mm Audio jack	R&L Channels +3.5mm Audio jack
Output power	50W*2 (left and right channels) +100W (heavy bass)	50W*2 (left and right channels) +100W (heavy bass)
Output filter	NO filter	Professional audio LC filter
Protections	overcurrent、short circuit、overtemperature protection and electrostatic protection	over temperature、overvoltage、undervoltage、DC-detect and short circuit protection and electrostatic protection
Thermal solution	Heat sink and shell	Heat sink and shell
Left and right channel speakers	4-8Ω, 10-100W	4-8Ω, 10-100W
Subwoofer	4-8Ω, 20-200W	2-8Ω, 20-200W
Size	95mm*88mm*25mm	95mm*113mm*25mm
Weight	156g	189g



2.1 channel Bluetooth audio power amplifier board

50W×2+100W bass



The accessories come with 6 exquisite knob caps, 5 small and 1 large, two styles, which can be freely matched according to personal preferences



2. Multi-function main knob

Classic look **Multi-function main knob**


The main knob adopts a rotary encoder that is only used in high-end power amplifiers. Realize 360-degree stepless tuning, smooth feel, one-key start and stop. Long press switch machine operation is simple and convenient.

XY-S100L



3. Function Introduction


Button function introduction

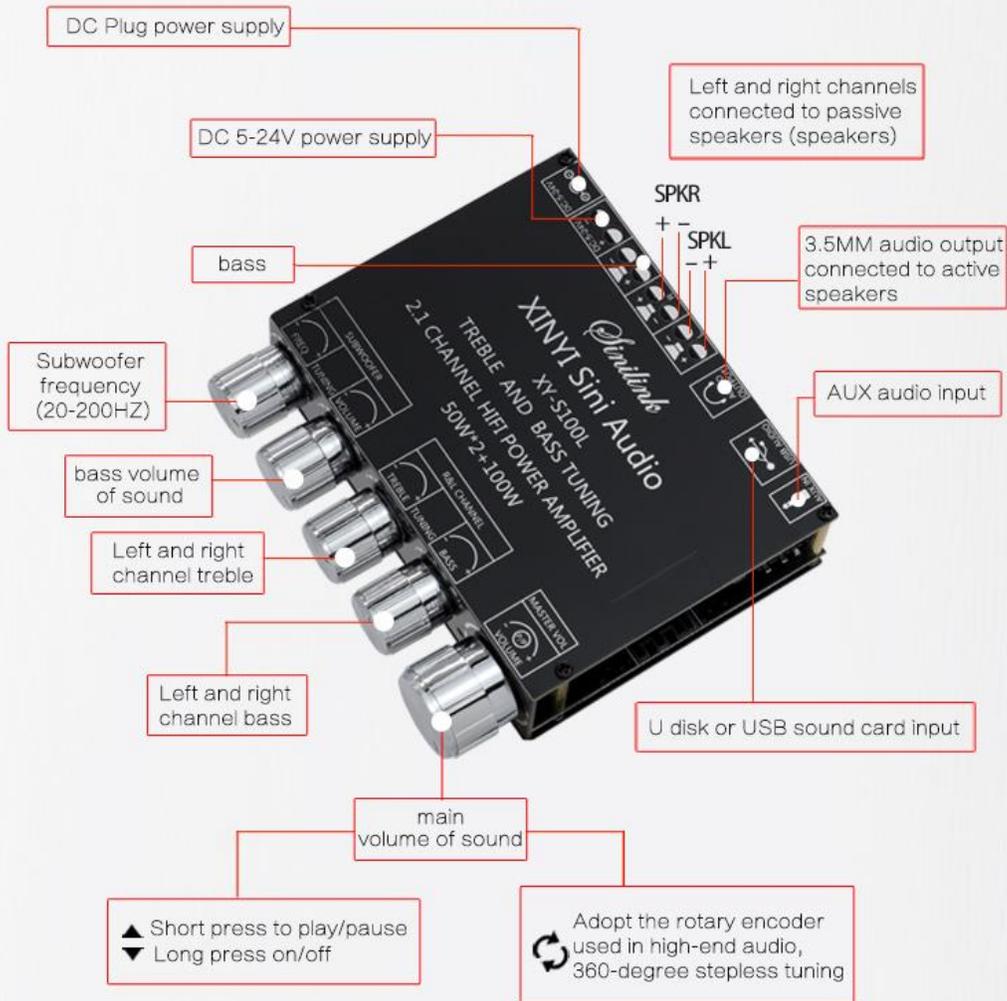


The U disk file system must be FAT32, and the maximum support is 32GB

4. Nude plate construction

Bare board structure display diagram

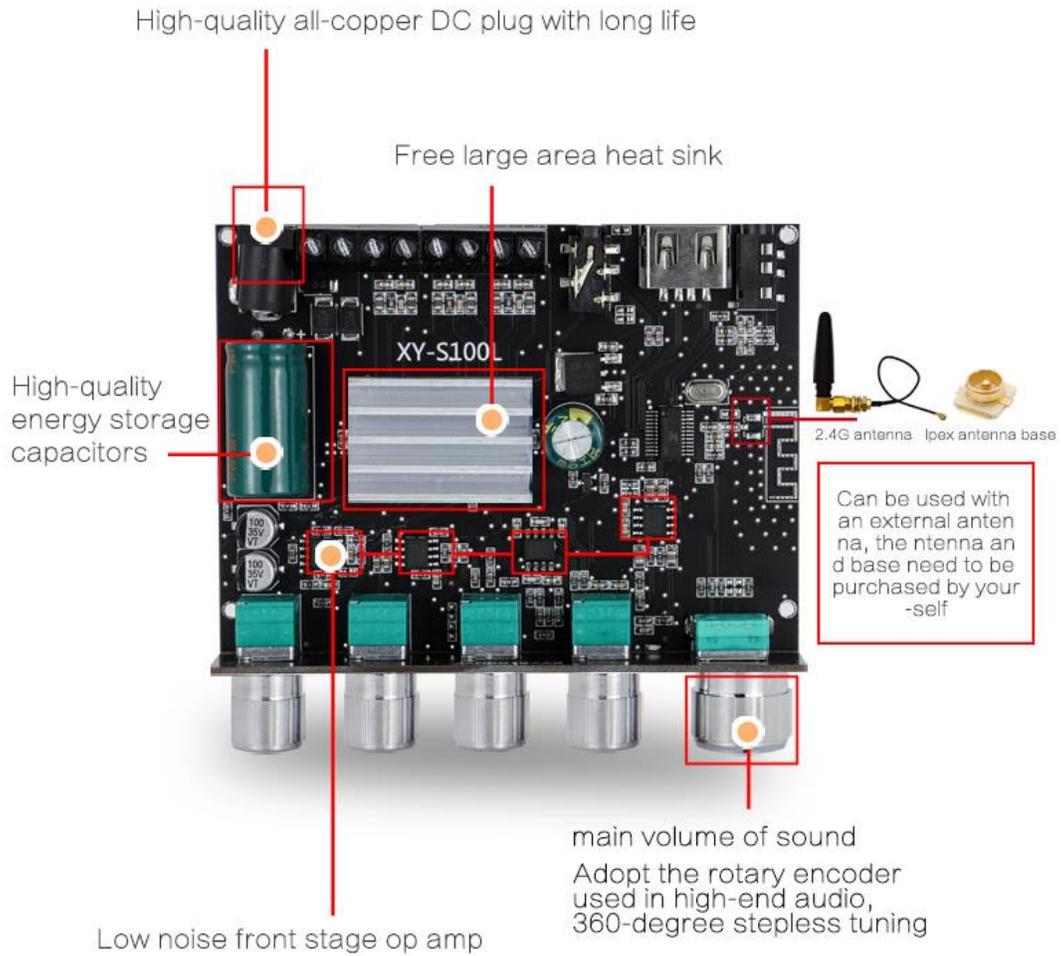

5. Installation schematic diagram

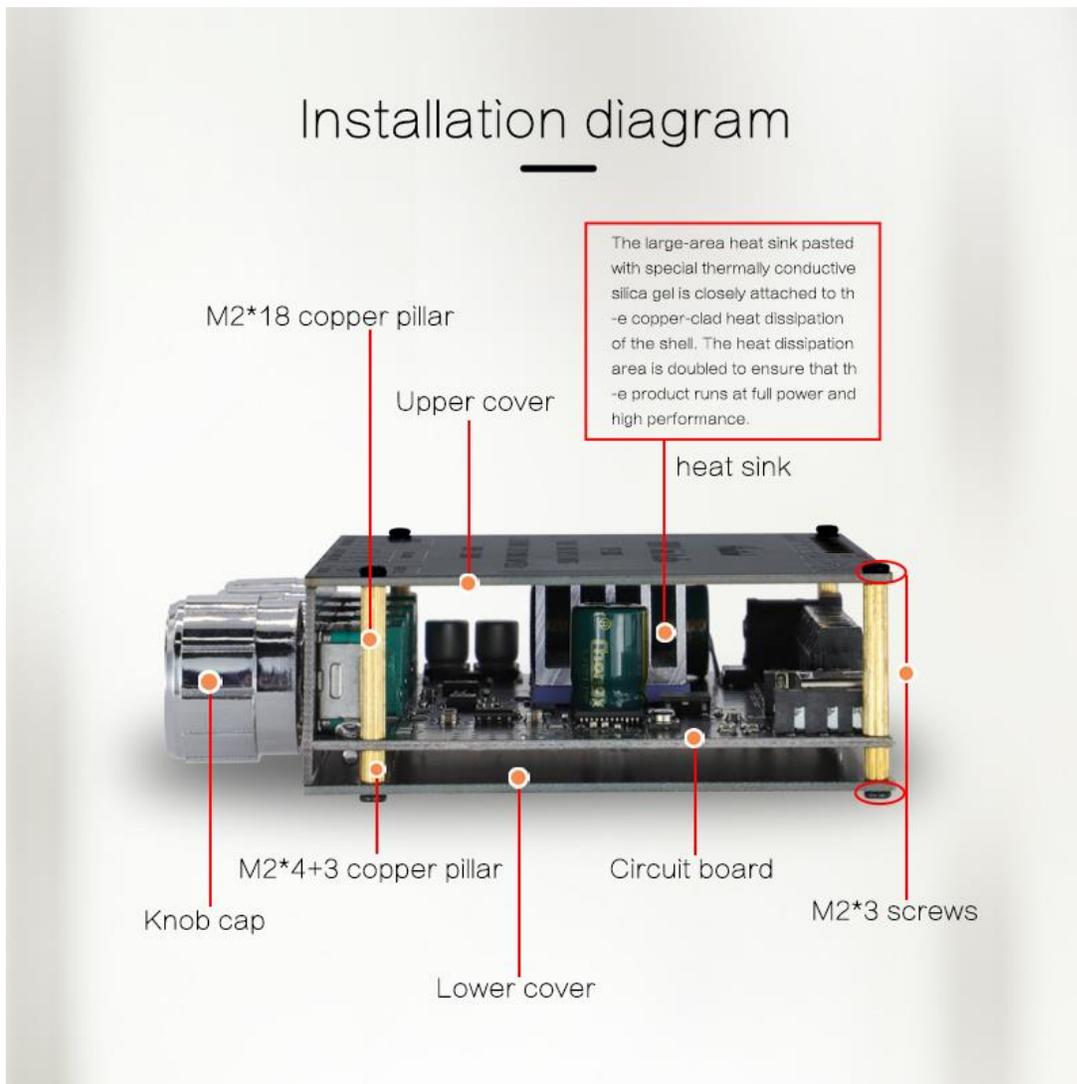

6.Product shipping list

Product list display diagram



Product + packaging weight: 156g



Upper cover



Product bare board



Lower cover



6 knob caps



M2*4+3 copper pillars 4



8 M2*3 screws



4 M2*18 copper pillars



heat sink



Thermal silica

7.product size



8.Product parameter table

Product parameter information table

Brand: XINYI Sini Audio Product Model: XY-S100L
Product name: 2.1 channel Bluetooth audio power amplifier board
Power supply: DC5-26V/10A or more
Audio channel: 2.1 channel Bluetooth version: 5.0
Audio input: Bluetooth+AUX+U disk+USB sound card
Audio output: left and right channel + bass + 3.5mm interface stereo output
Volume adjustment: high-end encoder knob adjustment, smooth feel
Frequency range: 20Hz-30KHz S/N ratio: 92dB
Output power: 50W*2 (left and right channels) + 100W (subwoofer)
Satellite box (left and right channel) adapted speakers: 10W-100W /4Ω-8Ω
Subwoofer (subwoofer) adapted speakers: 20W-200W /4Ω-8Ω
Protection mechanism: static electricity, overcurrent, short circuit, overheating protection
Unique function: support Sinilink-APP control
Product size: 95mm*88mm*25mm Product weight: 156g

9.Notes for product use

9.1 Heat sink installation

During assembly, we must pay attention to the installation of the heat sink, stick the silicon gel to the radiator, and then stick the silicone side to the amplifier chip; note that the radiator metal shell must not contact with the surrounding components to avoid short circuit; finally, the top plate press the heat sink, through the top plate to achieve better heat dissipation effect.

9.2 Audio input mode switch

This product default Bluetooth mode without any external audio device; if the external playback device is inserted into AUX or U disk, the default is AUX or U disk play mode; follow the priority, such as inserting AUX, during Bluetooth playback, immediately switch to AUX playback; if inserting U disk, immediately switch to U disk play; switching audio mode can also choose with APP, which is very convenient.

Try to choose AUX lines with shielding to reduce noise.

U disk playback to use MP3 format as possible, WAV format sampling rate must be within 44100Hz, too high sampling rate may lead to not playback.

When using the USB sound card function, you can connect the computer with the USB data cable. Without installing any drive, most computer systems will switch the USB sound card by default. If you cannot switch automatically, you can manually choose to switch.

9.3 Power supply selection

Power supply range 5-26VDC, compatible with standard 5.5-2.1/2.5 power adapter plug, recommended 12V/24V standard power adapter, current output above 10A.

Power power must be greater than the sum of the horn power.

Select the power size is related to the horn power used, if it is pushing the 4 Ω horn recommended power supply below 20V, push the 8 Ω horn recommended 24V power supply

The supply voltage must not be higher than 26V, and higher than 26V, circuit board is burned.

If the volume is increased during the playback process, the power amplifier board is restarted, which is caused by insufficient power supply, and you can replace the power supply with a larger output current.

9.4 Horn selection

Left and right channel speakers

The left and right channels can continuously output 50W*2 of power, 10W~100W horns can be pushed, and a 4-8 Ω full frequency horn is recommended.

Heavy bass horn

Heavy bass channels can continuously output 100W of power, 20-200W speakers can be pushed, 4-8 ohms bass horn is recommended, the frequency of 20Hz-200Hz best.

If the horn is less than the continuous output power of the power amplifier, the supply voltage can be appropriately reduced, or the volume can be adjusted to avoid the noise caused because the power amplifier output power is greater than the power of the horn. If multiple horns are used in parallel, be sure that the total impedance after the horn in parallel is controlled above 4 ohms, too small impedance, the power amplifier is easy to enter the overcurrent protection state.


9.5 Signal problem

This product uses a PCB antenna with the visible distance of 15 m without shielding. If you do not find Bluetooth, or connect to Bluetooth, it is a signal problem.

Stay away from the router when used.

Avoid use on metal tops, which will affect the PCB antenna signal
Modify the speaker, if it is a metal shell, be sure to put the antenna out of the shell, the metal will shield the signal.

10.How to connect your mobile phone to Bluetooth

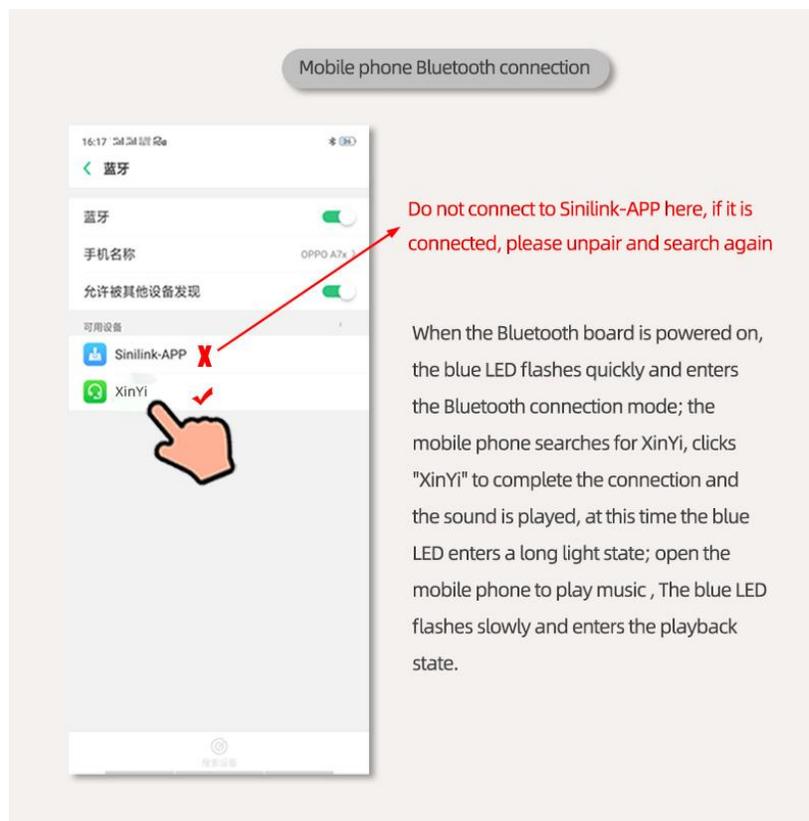

Make sure that Bluetooth enters Bluetooth connection mode-blue LED flash, AUX do not insert, can not enter Bluetooth connection state after insertion

Search for Bluetooth on the mobile phone, found "complete the connection after XINYI", click, accompanied with the prompt sound. After the successful connection, the LED enters the long beam state, open the mobile phone music software to play music, blue LED flash, enter the playing state;

When the phone searches for Bluetooth, come out. "Sinilink-APP", don't connect this Bluetooth here, this is connected inside the APP. If connected, please cancel the pairing and search again, otherwise it will cause you unable to connect inside the phone APP.

11.How to download a mobile APP

扫码下载APP



Scan Download APP

Scan the code to download APP, foreign customers please download in Google Market,hunt for 'sinilink' download.

12.How to connect to your cell phone APP

Steps to connect Bluetooth via mobile APP

Note:When using the APP, you must turn on all the APP permissions in the phone settings, otherwise some phones,compatibility issues will occur, causing Bluetooth to fail to connect.




First step
Click the little yellow dot



Second step
Click to connect Bluetooth device



The fourth step
Connection succeeded

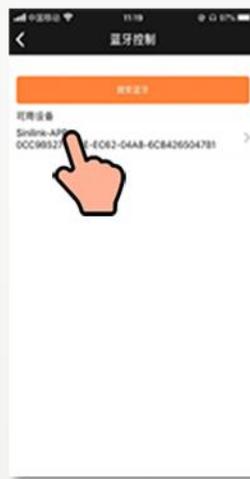

Third step
Search Bluetooth
Connect to Sinlink-APP

Turn on the location information of the phone when using the APP

